


smartVIS3D - scanning software package



simplified handling for high performance measurements
high performance computing for faster results

smart WLI 



smartVIS3D


- selection of the scanning volume in xyz
- selection of the measuring parameters
 - objective
 - light settings
 - speed (step height, camera parameters)
 - EPSI / VSI
- selection of the evaluation macro / MountainsMap




MountainsMap

- graphical presentations
 - profiles
 - 3d plots
- evaluation
 - roughness parameters
 - contour measurements
 - structure classification
- tolerance check
- data export and data storage
 - protocols
 - measuring results


MountainsMap – 3D plot of a lens

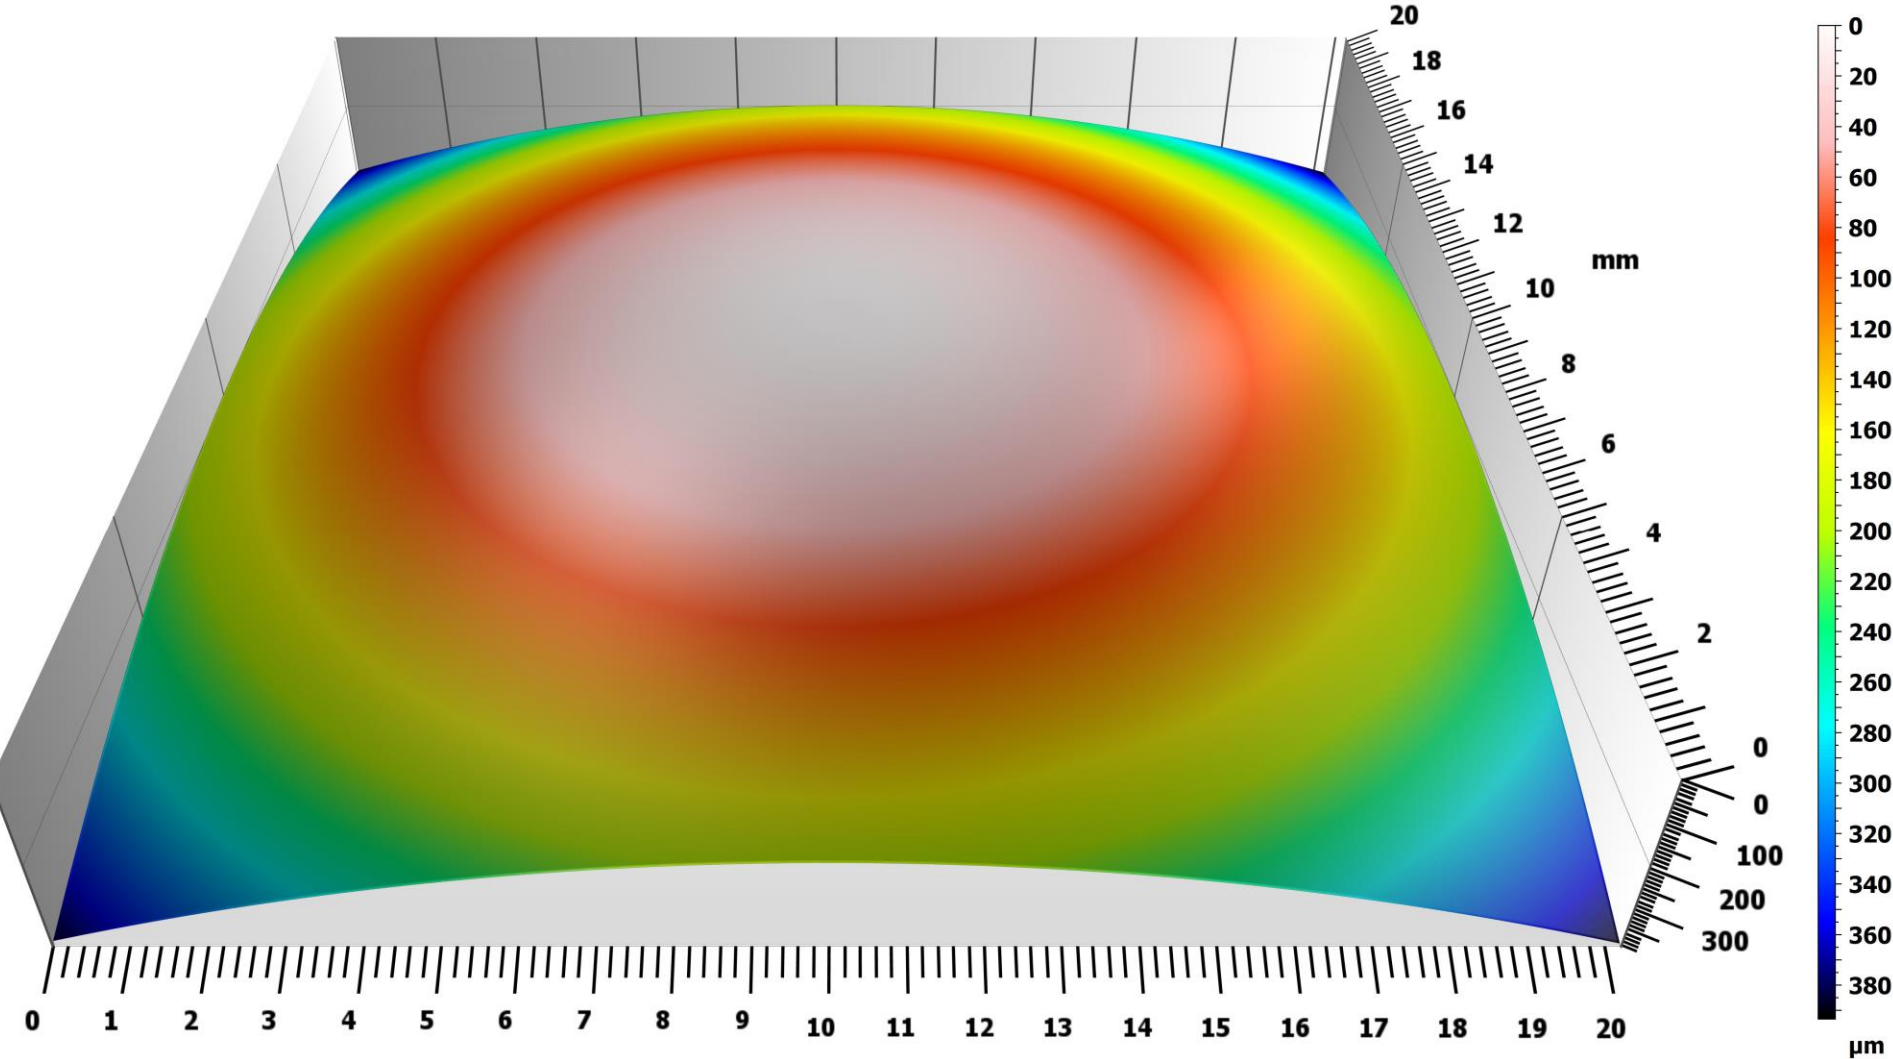

MountainsMap evaluate the data automatically




area editing to speed up scanning processes


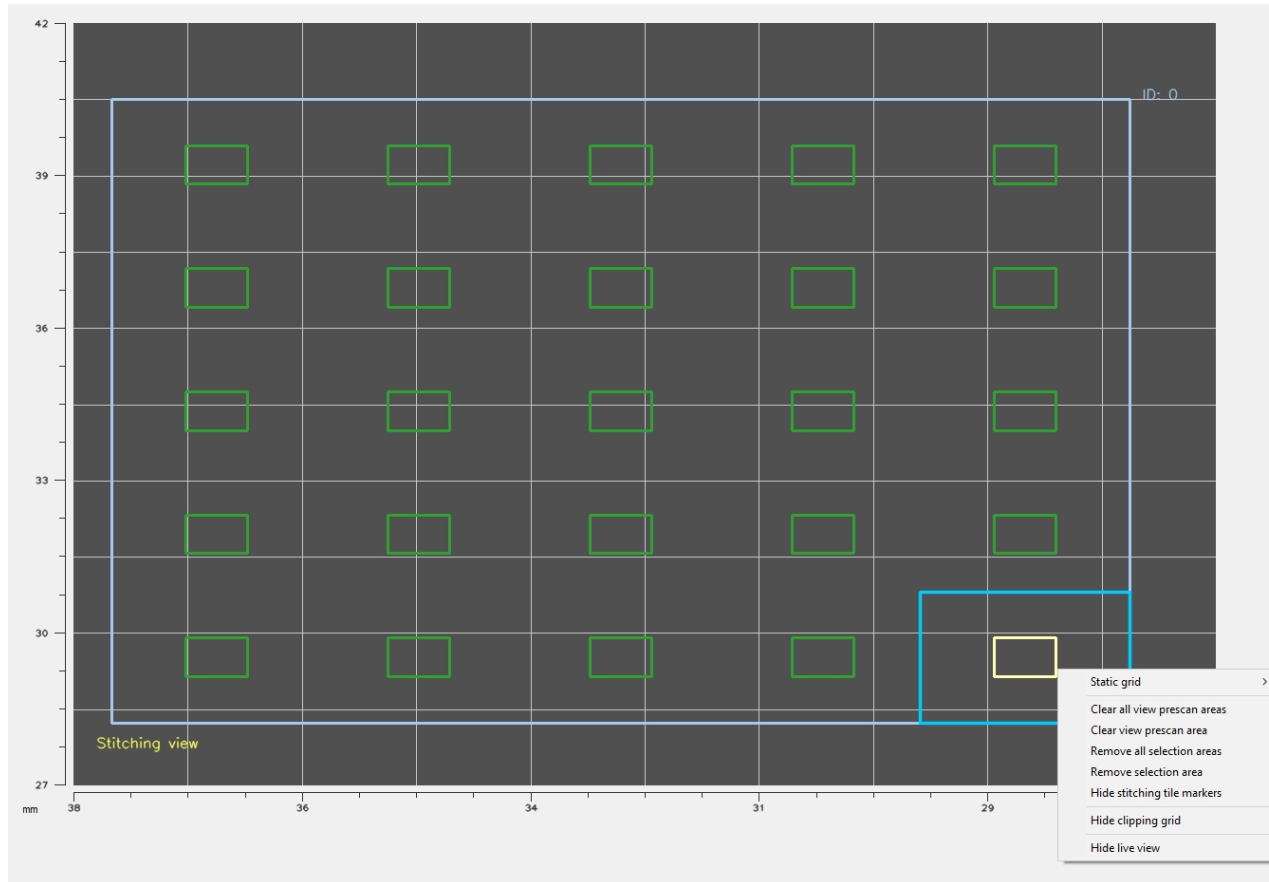


area editing

- ***elimination of single scans***
- ***modification of the scanning in z-axis***



more than 3000 cores provide the calculation power of 10 TFLOPS!

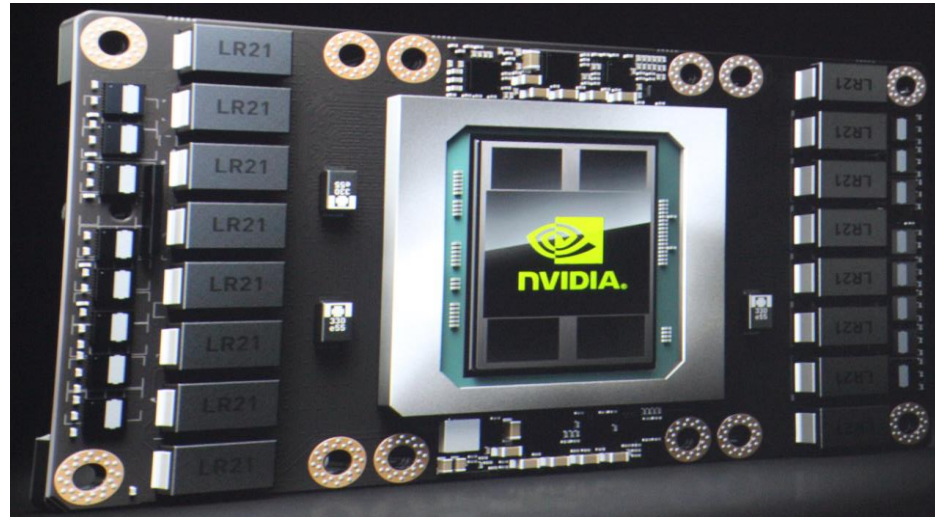


acceleration of the
measurement





improvement of the
data quality

high speed vertical scanning

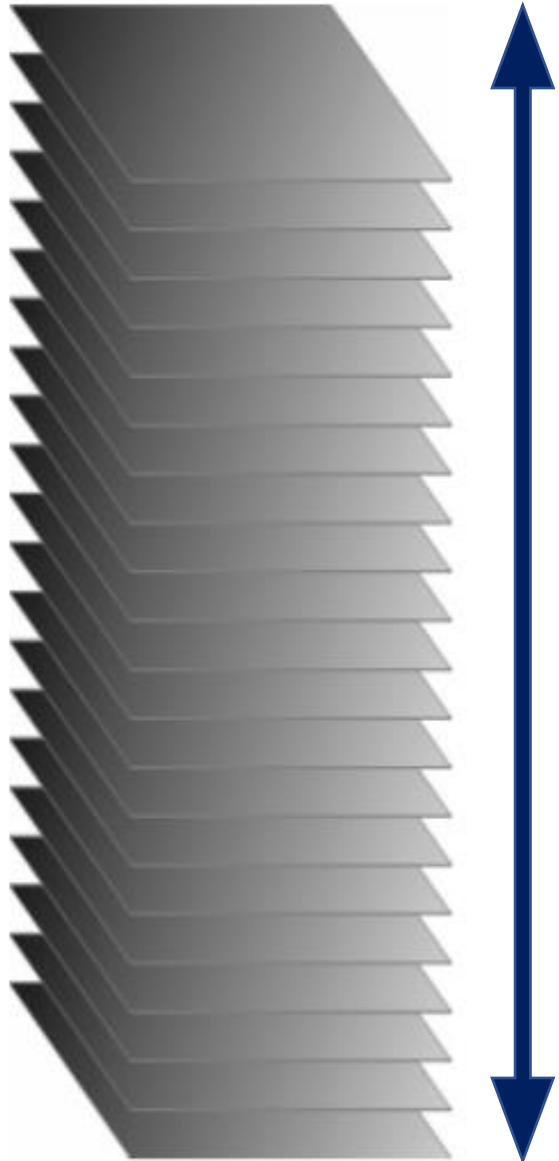- 
- ✓ up to 5 mm scanning range
 - ✓ up to 5 MP / measuring points
 - ✓ up to 3000 images per second
 - ✓ adjustable z increments
 - ✓ up to 400 $\mu\text{m/s}$ scanning speed
 - ✓ up to 75.000 images
 - ✓ up to 450 GB image data

**evaluated in real time
on the graphic board**




high resolution 3D data without delay!

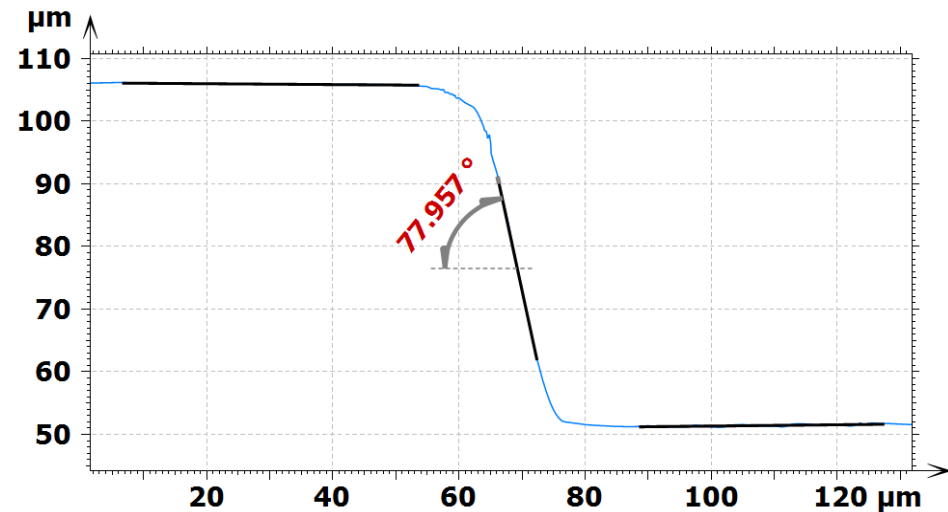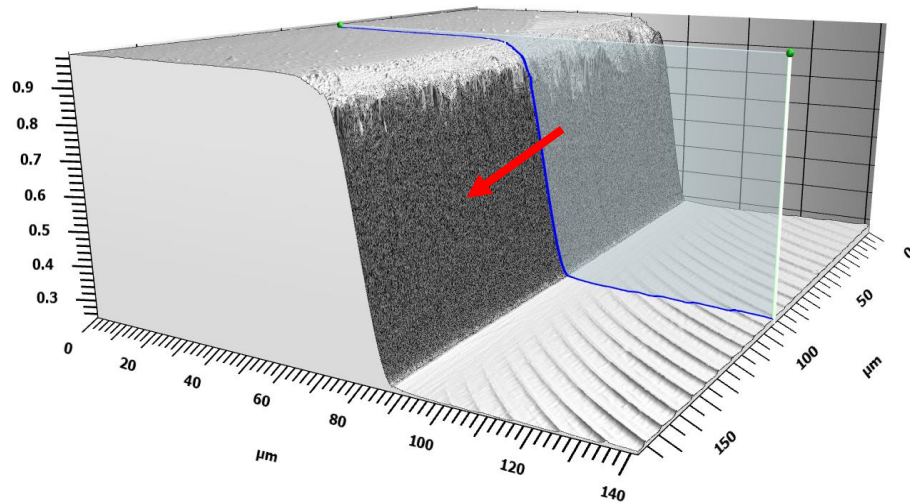


smooth and transparent flank with overlapped data quality map:



- even on the high inclined flank are still app. 70% valid points
- smartVIS3D can eliminate outliers based on data quality information calculated out of the image stack for each pixel without any information from neighborhood points
- the quality indicates the agreement between registered signal and ideal correlogram
- the data quality layer takes app. 50% of the calculation power but is the reason to trust each single pixel and being able to analyze larger areas with lower magnification objectives as well as the measurement of real inclined surfaces

contrast enhancement

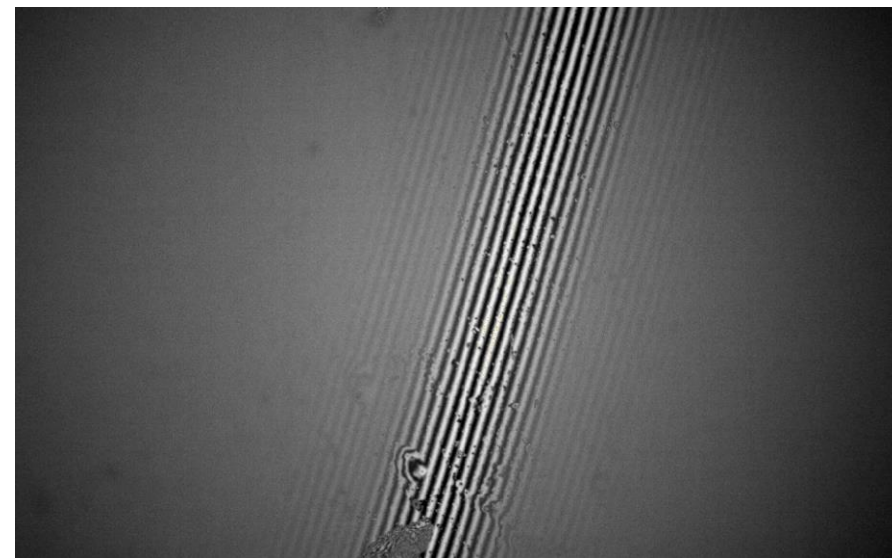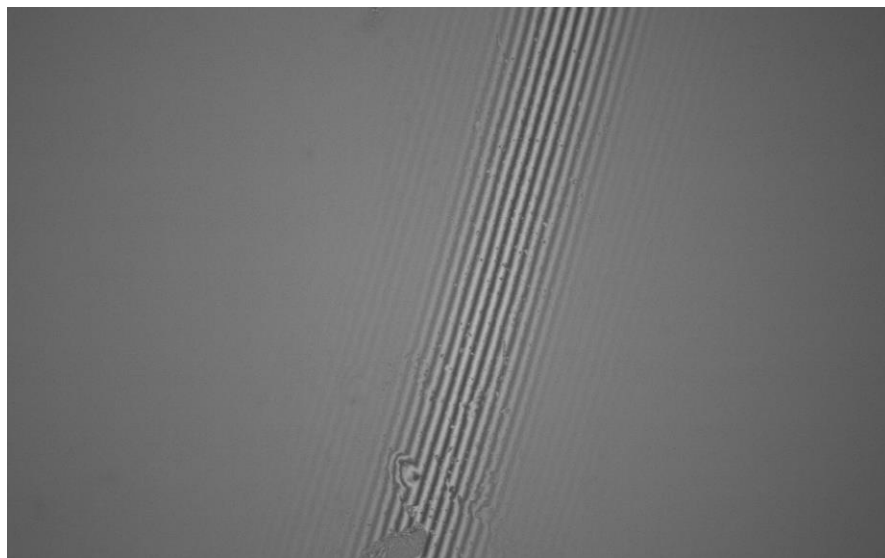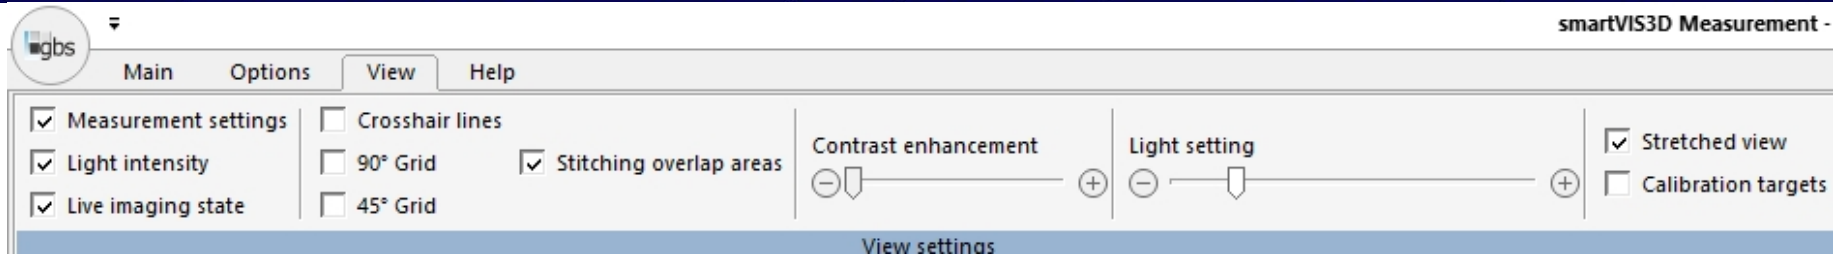

contrast enhancement and light control simplifies the sample positioning and measurement for sloped and transparent samples



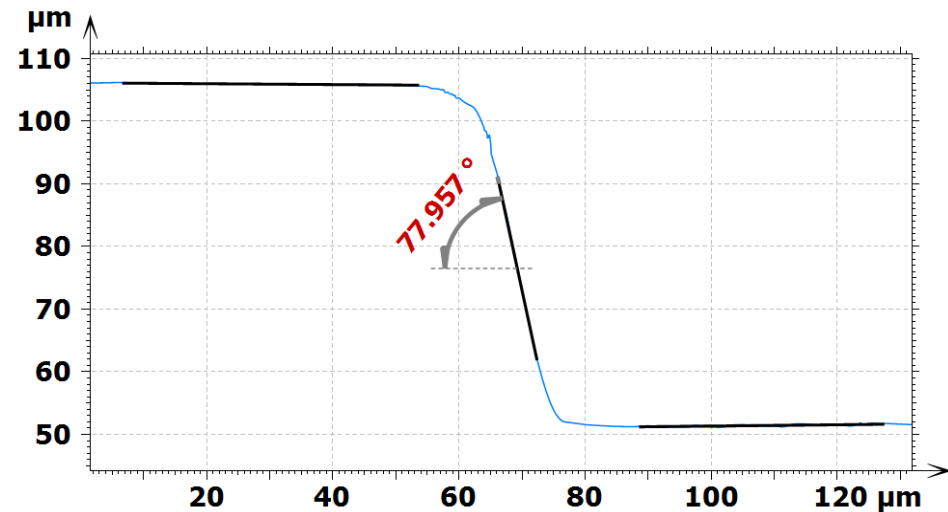
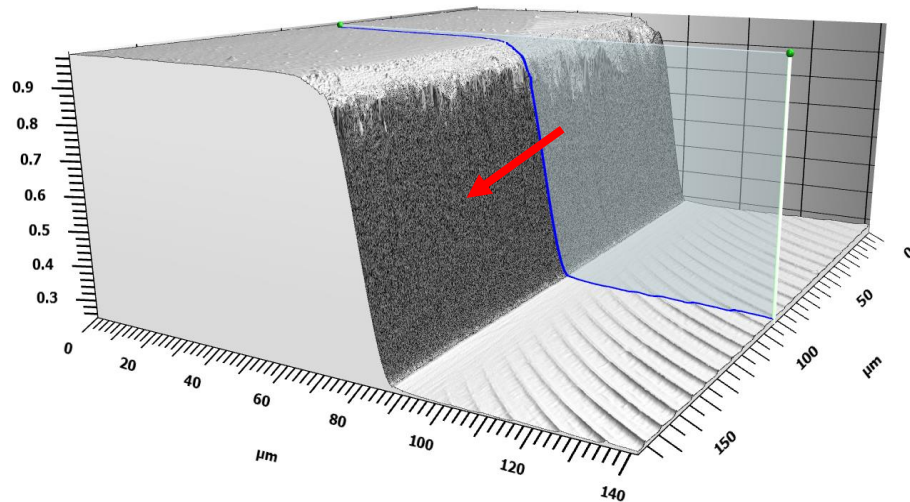


smooth and transparent flank with overlapped data quality map:



- even on the high inclined flank are still app. 70% valid points
- smartVIS3D can eliminate outliers based on data quality information calculated out of the image stack for each pixel without any information from neighborhood points
- the quality indicates the agreement between registered signal and ideal correlogram
- the data quality layer takes app. 50% of the calculation power but is the reason to trust each single pixel and being able to analyze larger areas with lower magnification objectives as well as the measurement of real inclined surfaces

EPSI scanning of an grind glass surface


EPSI

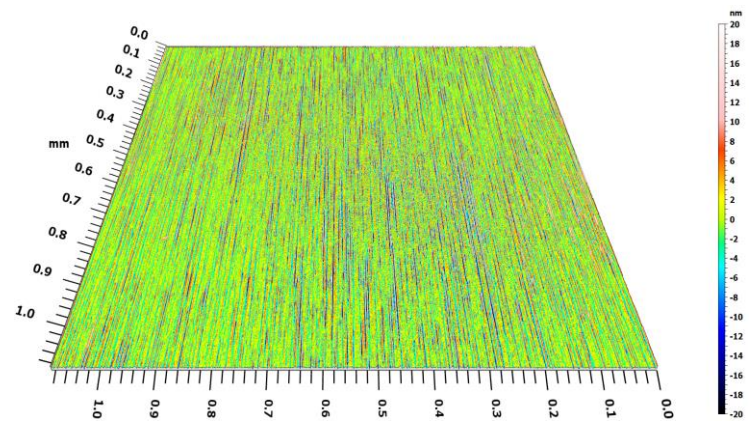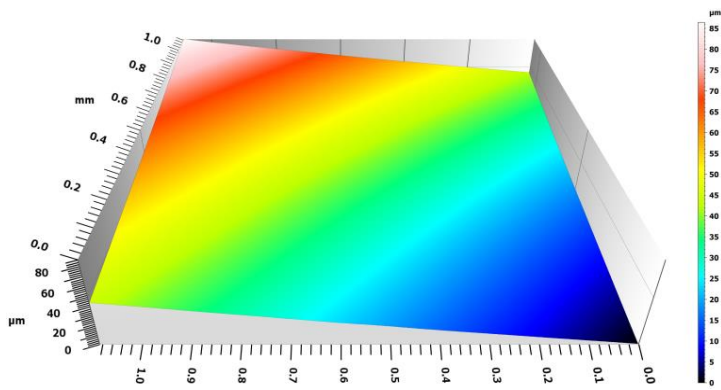


VSI

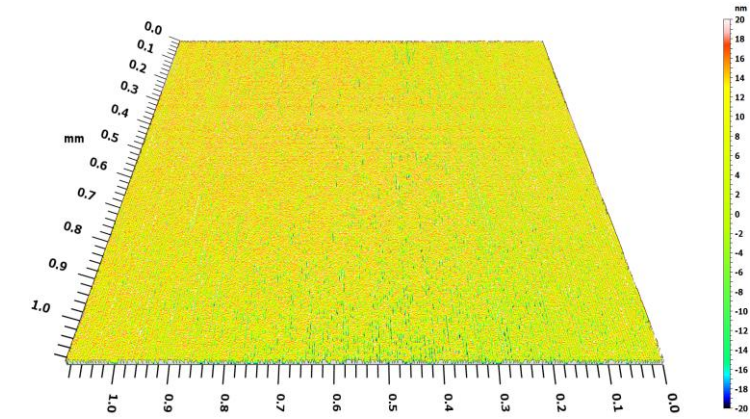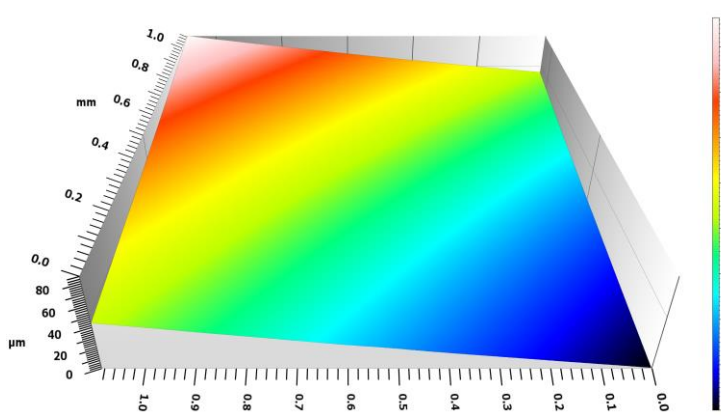

EPSI (extended phase-shift interferometry) provide sub-nanometer z resolution on smooth surfaces. It can be used on inclined surfaces with height differences up to app. 50 ... 100 μm per scan.




EPSI on smooth steps

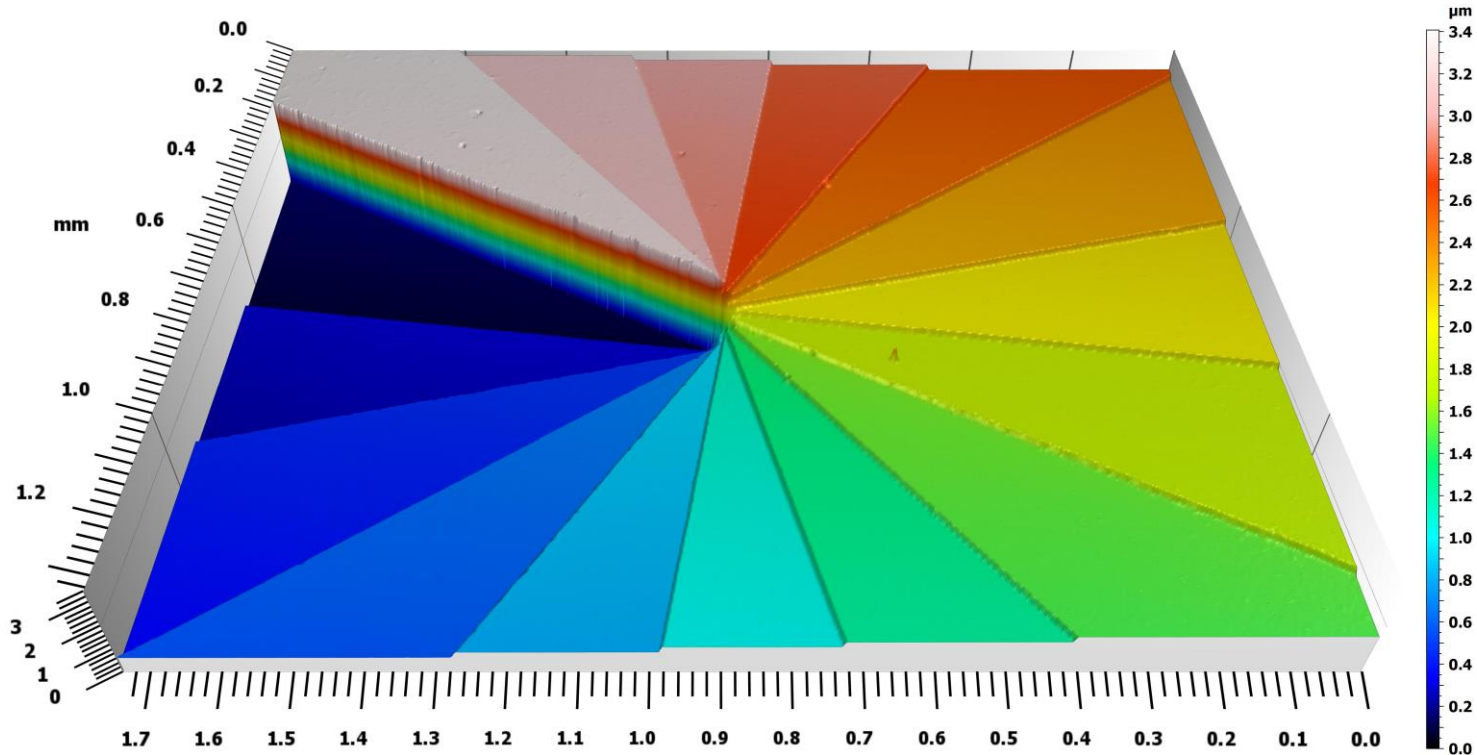


EPSI can be used on spiral staircase standards – surface which couldn't be measured with standard PSI (or PSI + unwrapping) algorithms.

smartVIS3D provide highest resolution in xyz

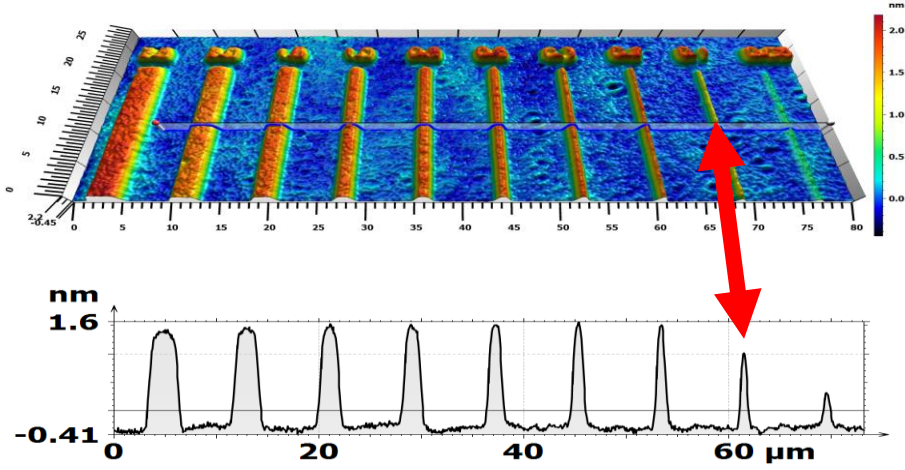


Standard with line structures:

- 100x objective
- partial area of a 170 x 140 μm²FOV
- configuration with 5 MP camera
- measuring point distance 0.07 μm
- on an 0.1 μm wide line structure the measured height value got down to app. 2/3 of the nominal value

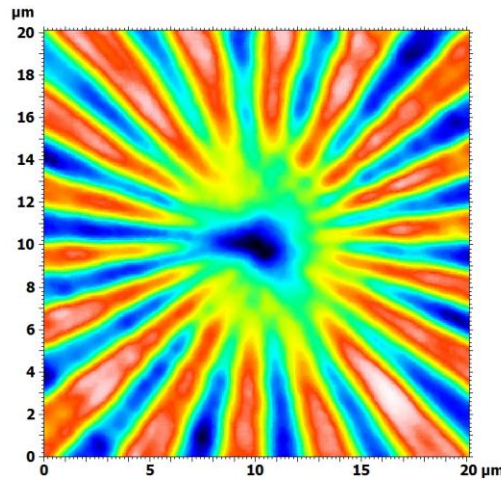

100x objective (partial area)

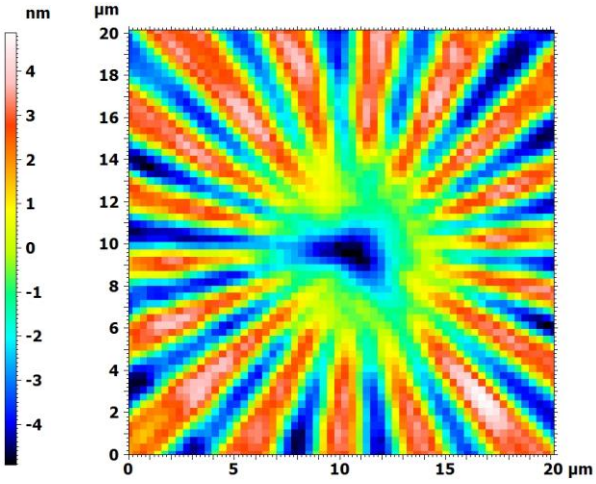

20x objective (partial area)

3D Siemens-Stern:

The result of the 20x objective proves the correct scan of the 3d structures compared to the 100x reference file down to the single points without influence of the direct neighborhood and similar height resolution.

